

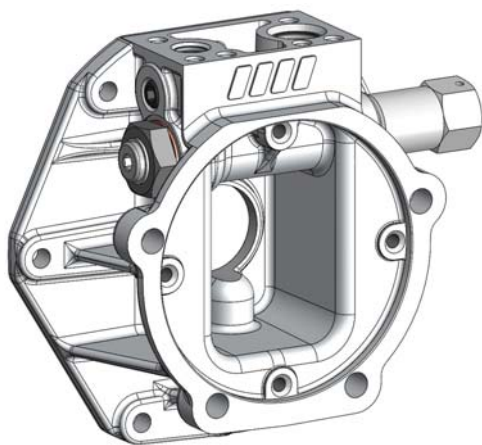


INSTRUCTIONS HOW TO CONVERT A DOUBLE ACTING POWER UNIT INTO A SINGLE ACTING ONE



POWERPACK WITH STEEL TANK

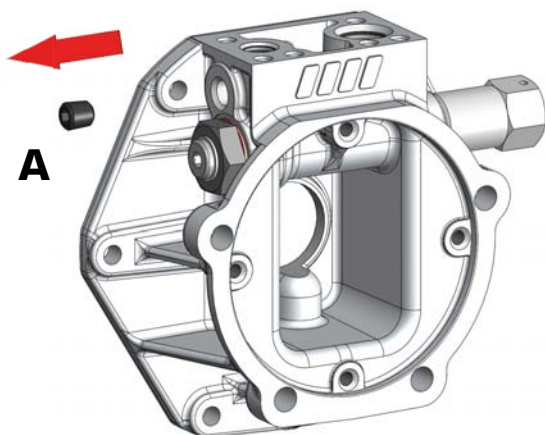


STARTING SITUATION


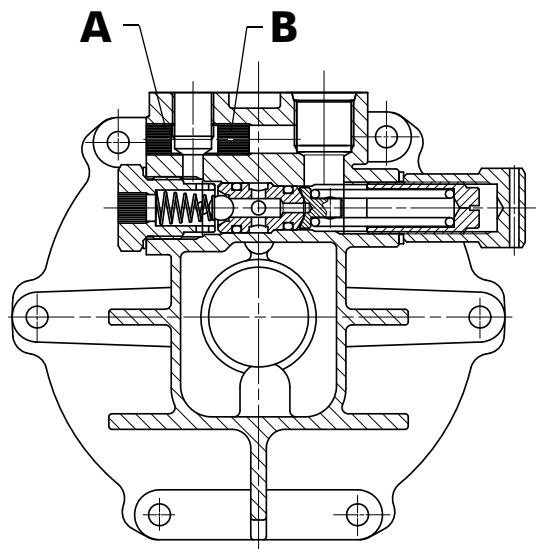


1) Remove the plug pos. **A** ref. 504-020-10087

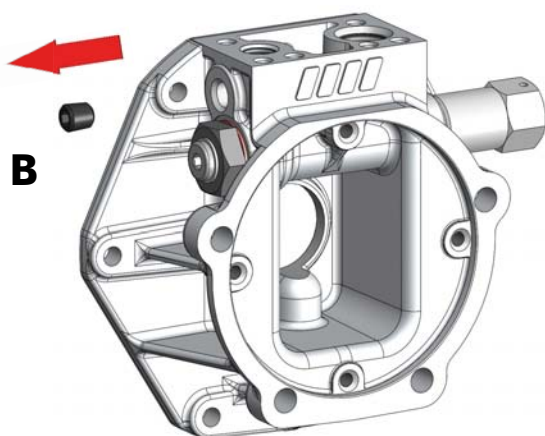
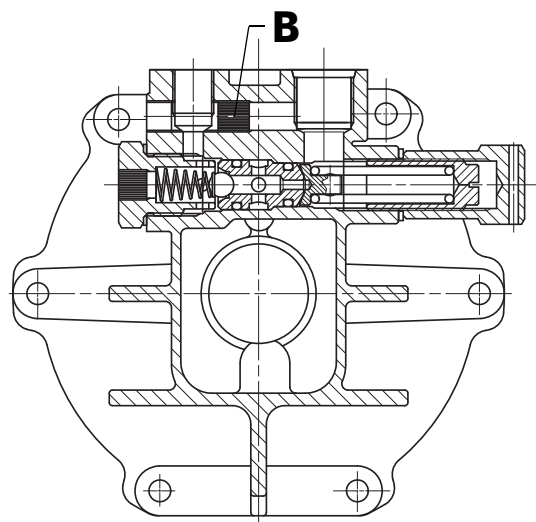


2) Remove and dispose the plug pos. **B**
ref. 504-014-10094

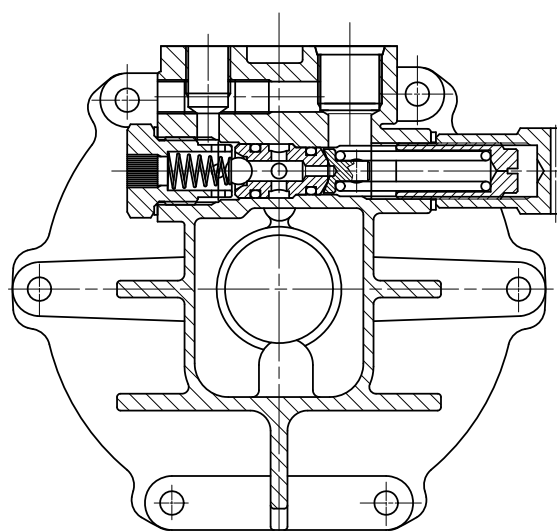

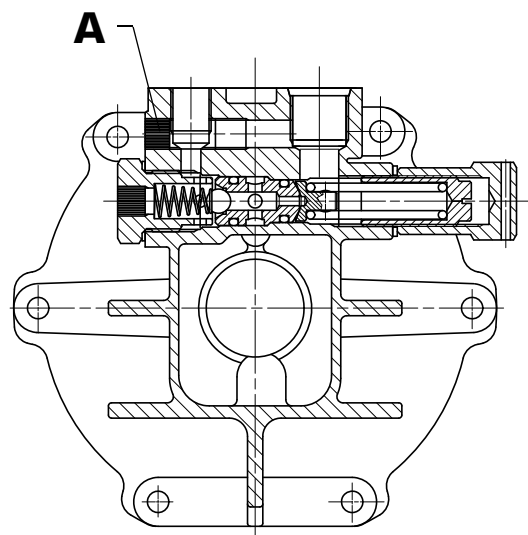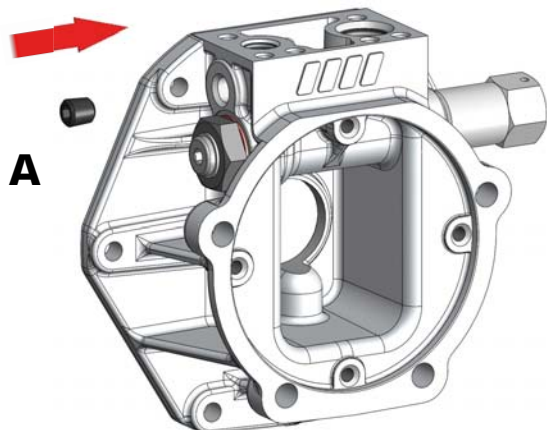

3) Re-fit the plug pos. **A**

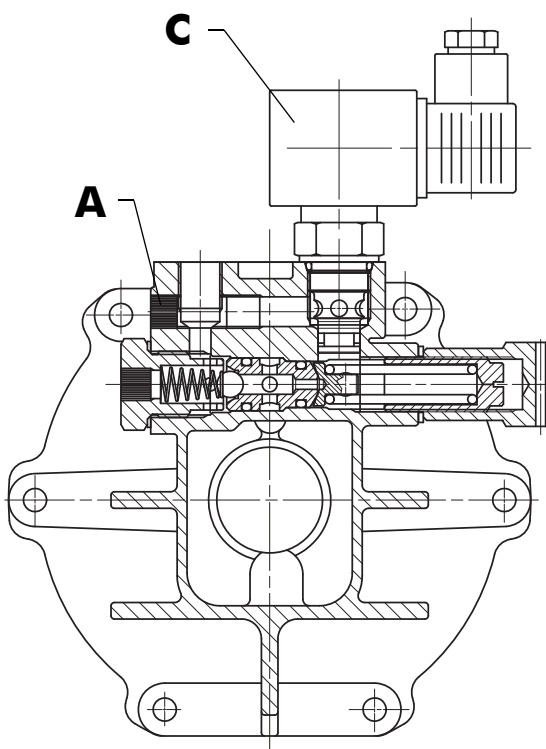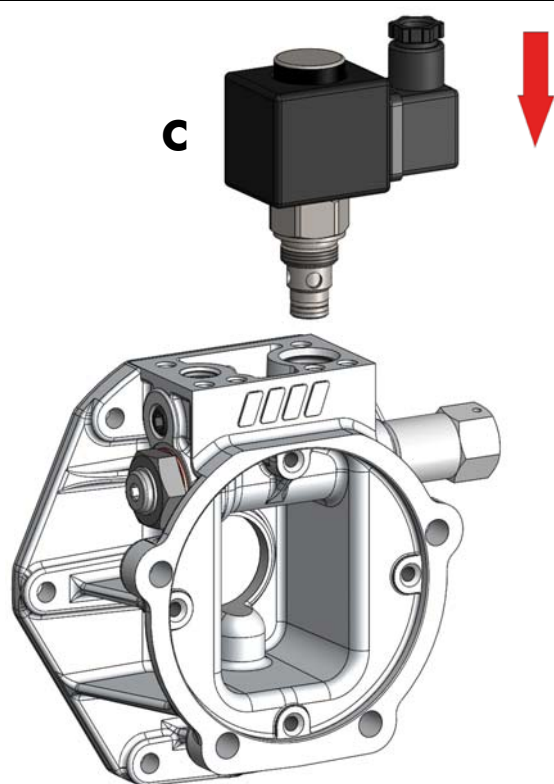

4) Fit the cartridge valve pos. **C** according to voltage and type required



The aluminium bell-housing is now **SINGLE ACTING**.

Data: Lunedì 23 maggio 2020



Codice foglio: 997-003-00523 Rev: AC

INSTRUCTIONS HOW TO CONVERT A SINGLE ACTING POWER UNIT INTO A DOUBLE ACTING ONE



POWERPACK WITH STEEL TANK

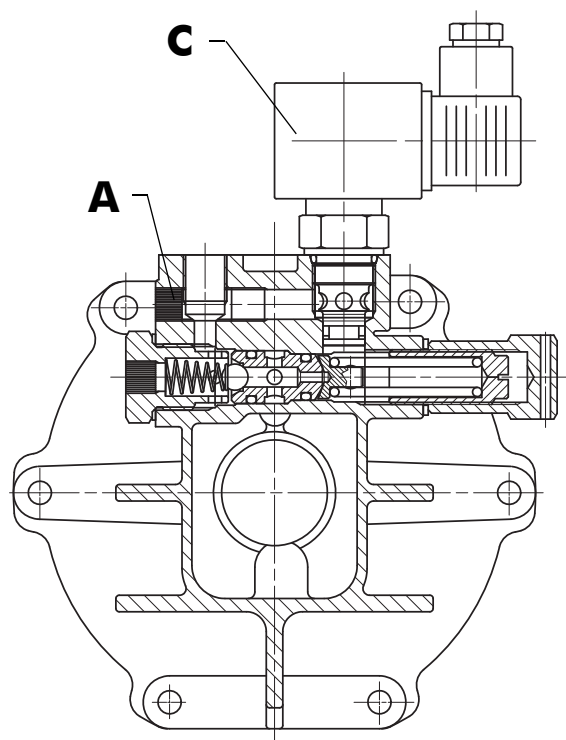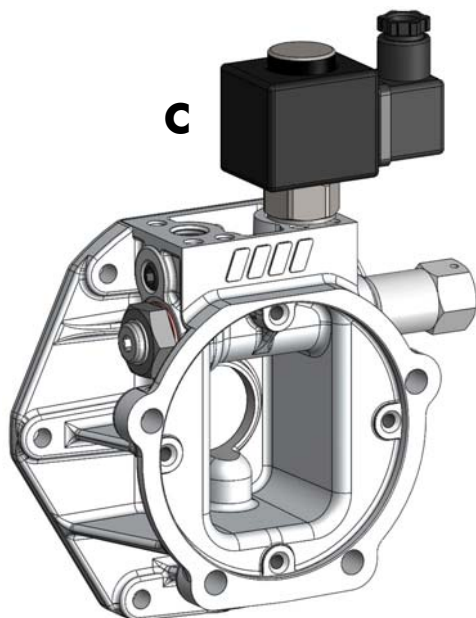



STARTING SITUATION

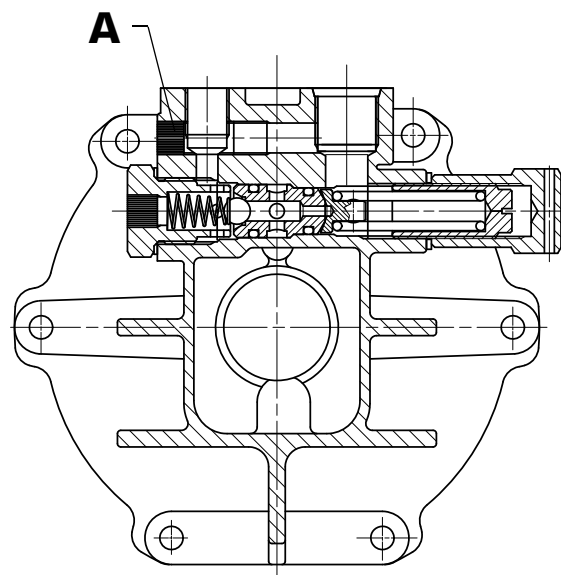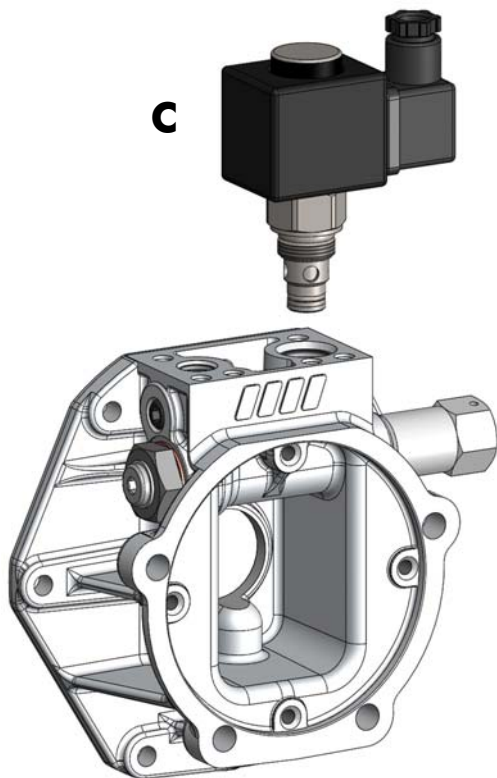



1) Remove the cartridge valve pos. **C**

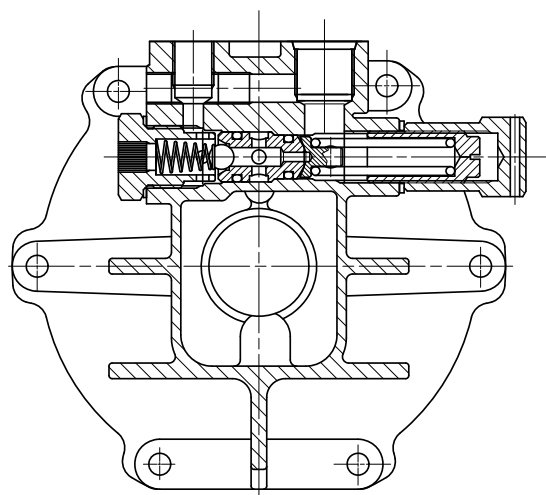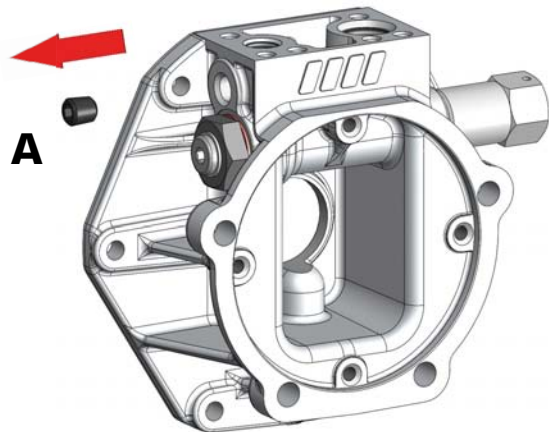

2) Remove the plug pos. **A** ref. 504-020-10087

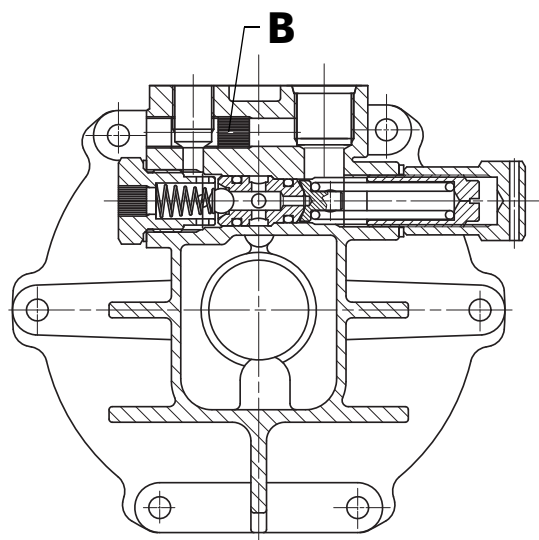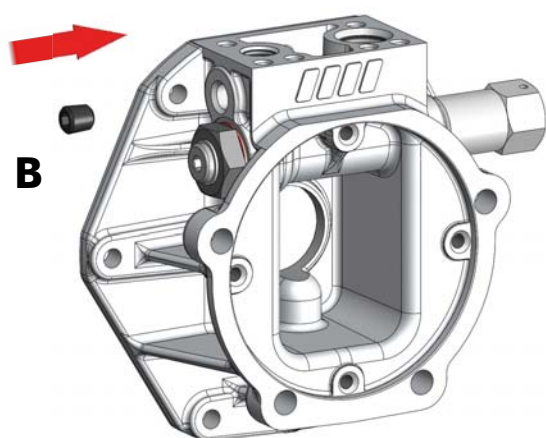

3) Screw-in the plug pos. **B** ref. 504-014-10094 (to order) in the proper seat

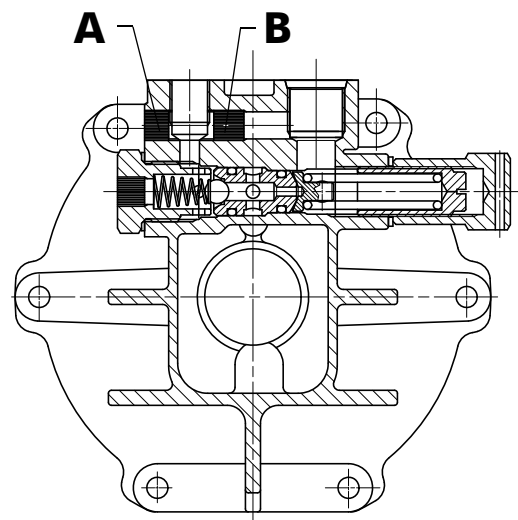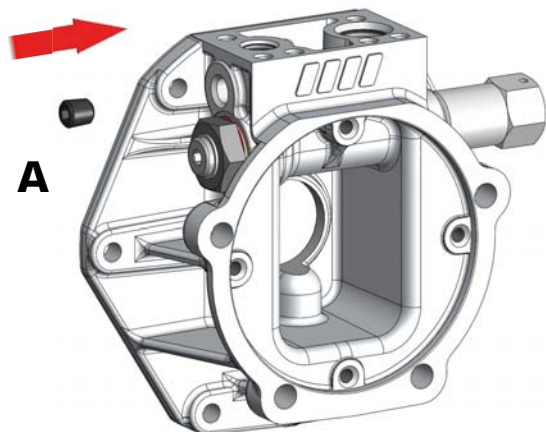


4) Re-fit the plug pos. **A**



The aluminium bell-housing is now **DOUBLE ACTING**.

INSTRUCTIONS HOW TO CONVERT A DOUBLE ACTING POWER UNIT INTO A SINGLE ACTING ONE



**POWER PRO
KUBE**

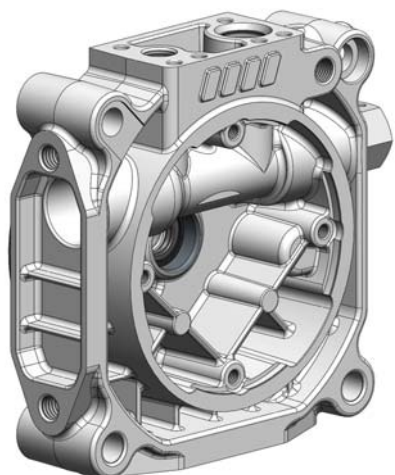


STARTING SITUATION

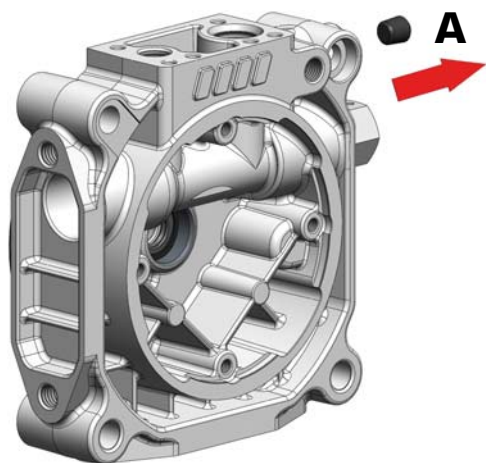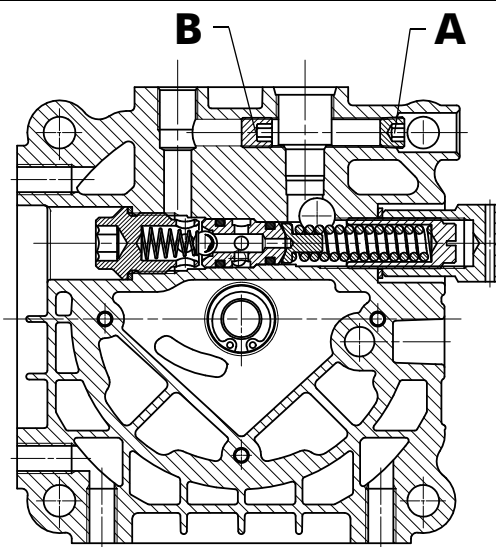


1) Remove the plug pos. **A** ref. 504-020-10087

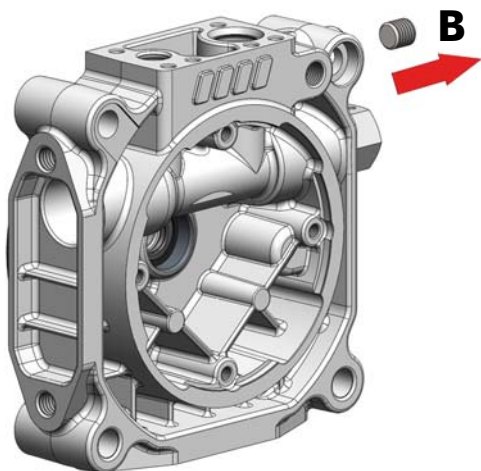
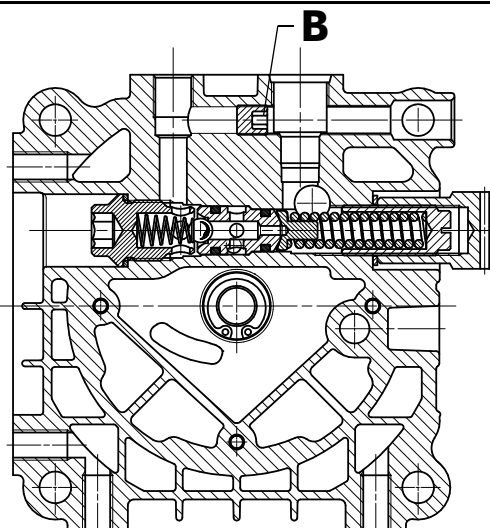


2) Remove and dispose the plug pos. **B**
ref. 504-014-10094


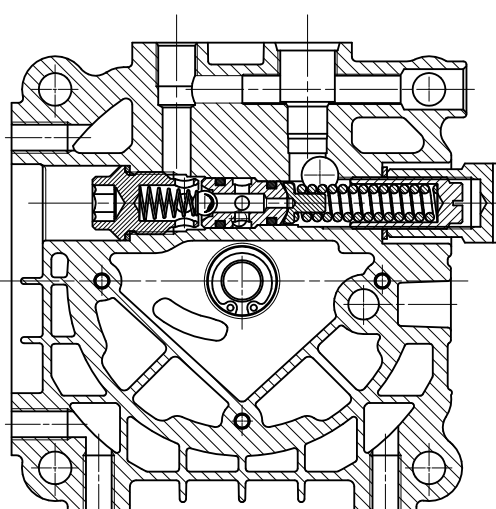


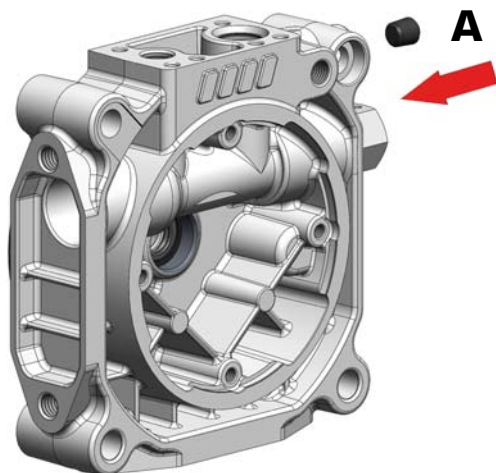

3) Re-fit the plug pos. **A**

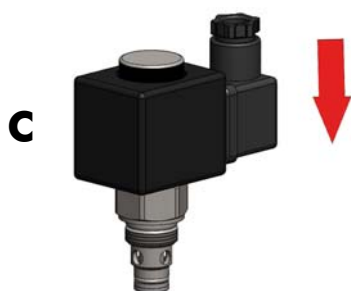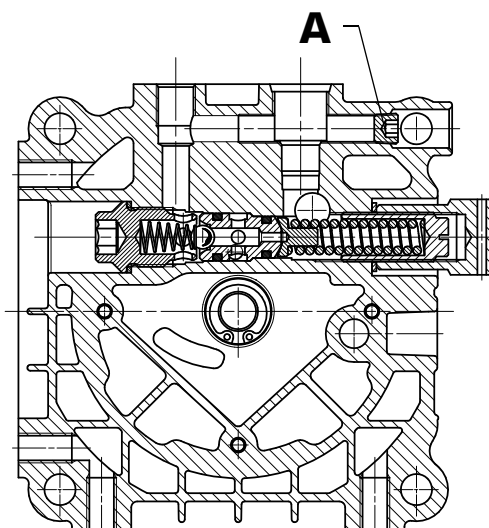

4) Fit the cartridge valve pos. **C** according to voltage and type required

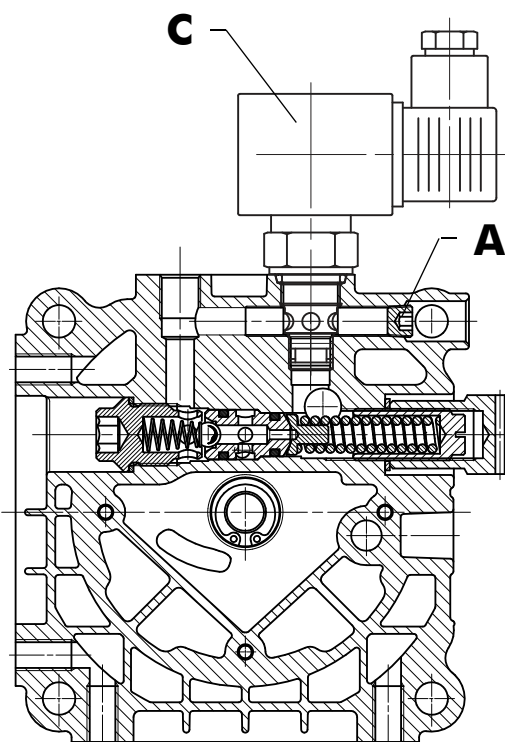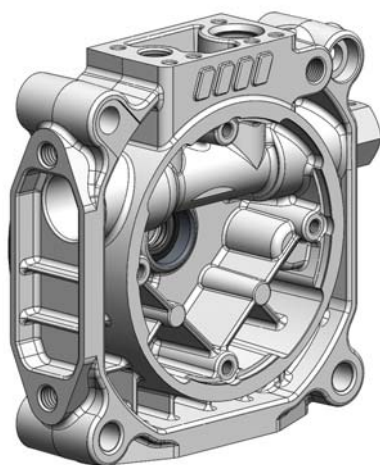


The aluminium bell-housing is now **SINGLE ACTING**.

Data: Lunedì 23 maggio 2020




Codice foglio: 997-003-00523 Rev: AC

INSTRUCTIONS HOW TO CONVERT A SINGLE ACTING POWER UNIT INTO A DOUBLE ACTING ONE



**POWER PRO
KUBE**

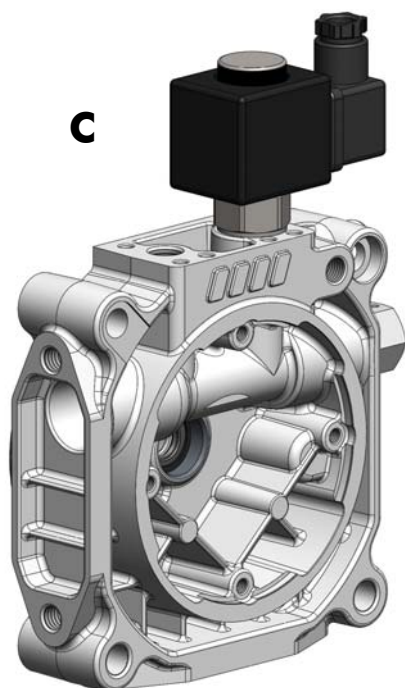



STARTING SITUATION

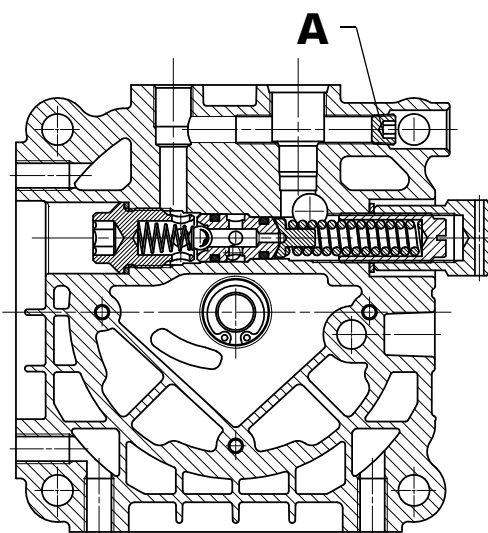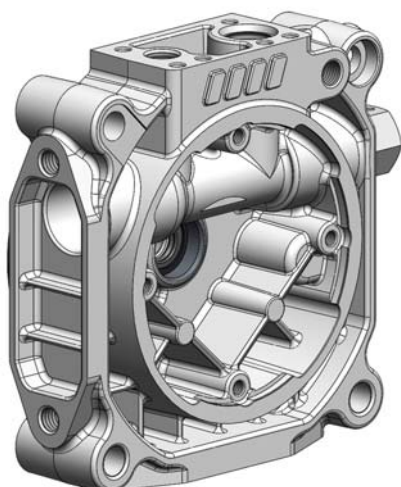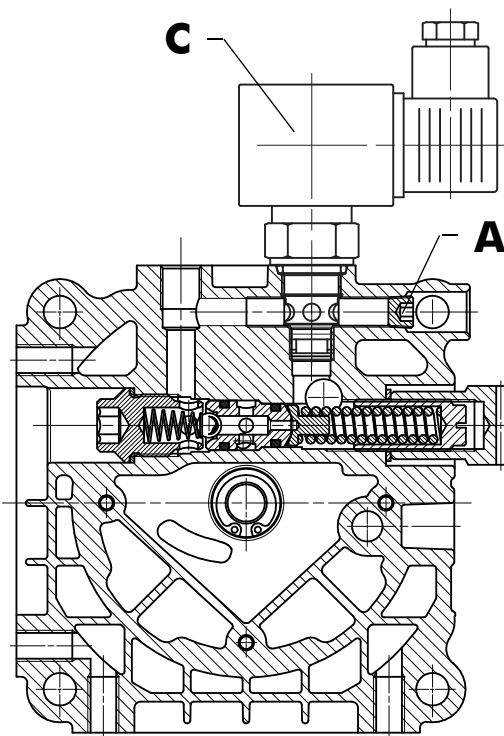



1) Remove the cartridge valve pos. **C**

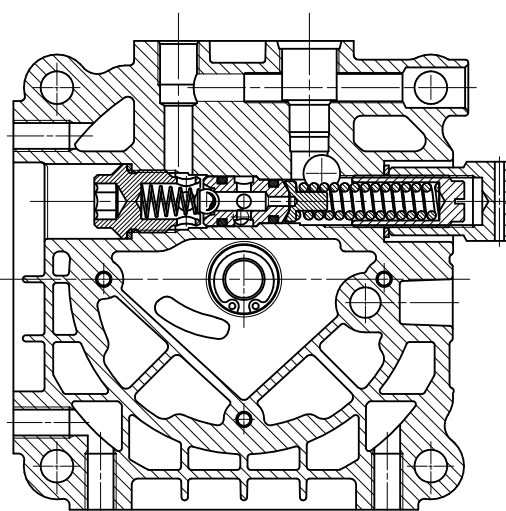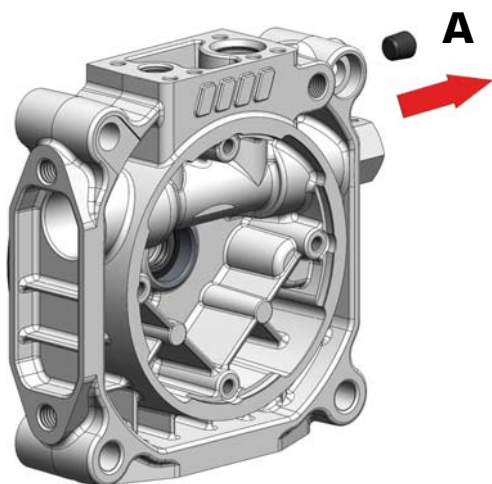

2) Remove the plug pos. **A** ref. 504-020-10087

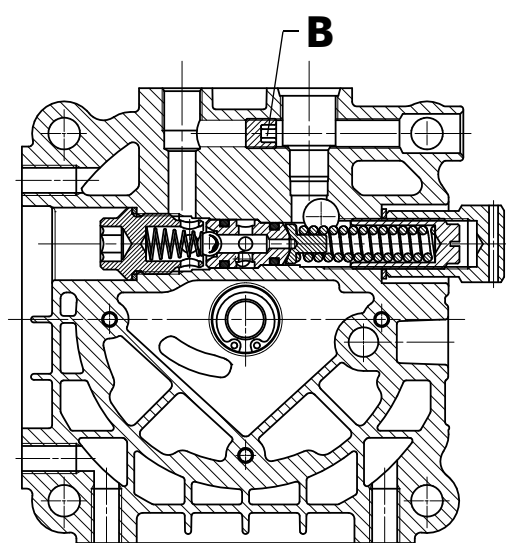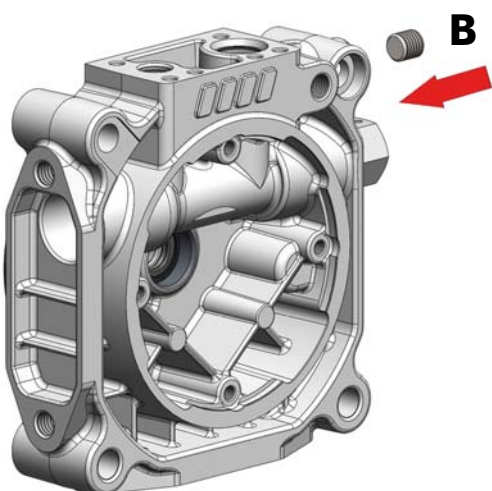

3) Screw-in the plug pos. **B** ref. 504-014-10094 (to order) in the proper seat

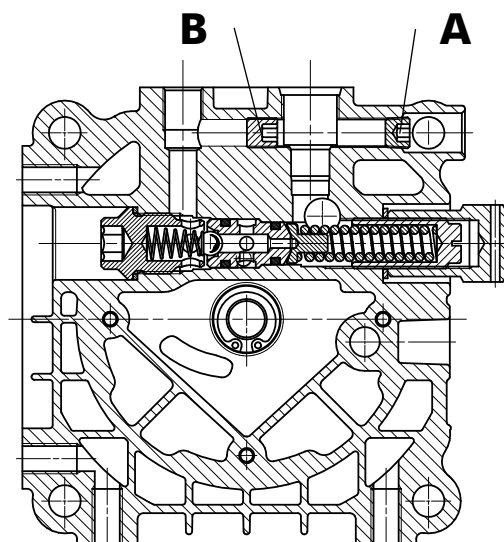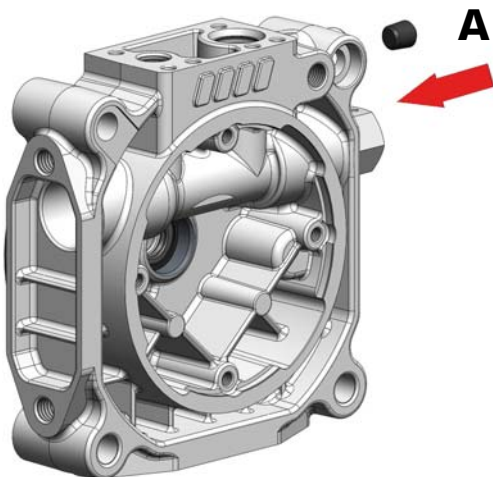

4) Re-fit the plug pos. **A**

Data: Lunedì 23 maggio 2020

Codice foglio: 997-003-00523 Rev: AC

The aluminium bell-housing is now **DOUBLE ACTING**.